




Electronic basin tap, operated by infrared sensor, powered by batteries

140 20° 114 (200) G1/2"

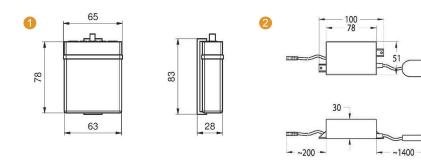





Characteristics

COMPOSITION:

- Chromed brass body
- · Infra-red sensor
- Bi-stable solenoid valve with water connections G1/2" (external)
- · Copper connecting pipe
- 4 alkaline batteries with water proof housing (external)

OPERATING CHARACTERISTICS

- Flow rate 6 I/min
- Operating pressure: Min 1 max 8 bar
 Water inlet temperature: 5 70 °C
- 1 Power supply: 4 alkaline batteries (included)
- Battery life cycles : 150.000 cycles
- · Activation: infra-red sensor with presence
- detection function
- Self opening : Every 24 hours since the last activation
- Vandal proof safety: Self-closing after 60 seconds of continuous flow
- Low battery safety: Low battery led indicator: in case of exhausted battery the mixer is kept closed

CERTIFICATIONS

• WRAS (approval number: 1503064)

OTHER VERSIONS

- 2 BS02511/R : Main powered 230 V
- **BS02511/PM**: BC02511 with mechanical mixer
- 4 BS02511/PT : BC02511 with thermostatic mixer
- ② 3 BS02511/RPM: Main powered 230 V w/mechanical mixer
- 2 4 BS02511/RPT : Main powered 230 V w/thermostatic mixer